

i3130



Leading educational multimedia technology and solutions supplier


- Fresh new portable design
- Plug and play USB
- Up to 200 images storage




Specifications

Model NO.	i3130
Sensor	1/3" CMOS
Zoom	9x optical, 16x digital
Frame rate	12/22
Output signal	SXGA, 720P, XGA
Image capture	Yes, 200 NON-volatile images
Rotation	90°, 180°, 270°(activation)
INPUT TERMINALS	
VGA	X1
AUDIO	X1
OUTPUT TERMINALS	
VGA	X1
AUDIO	X1
VIDEO	X1
DVI	X1
OTHER TERMINALS	
USB2.0	X1(USB camera)
SD CARD SLOT	X1
Software	Windows 7/XP, Mac OS
Power supply	12V DC power adapter


Dimensions

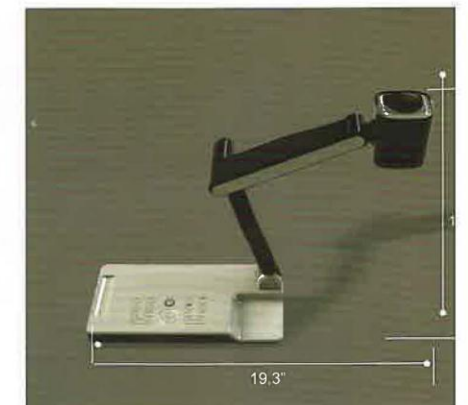

VGA IN/OUT

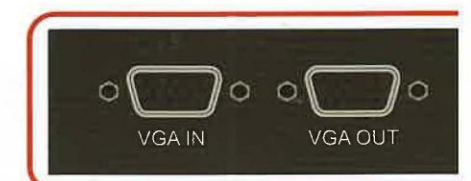

DVI OUT

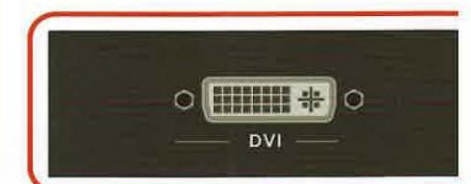

SPECIFICATIONS

Model	i2131
Sensor	1/3" Professional Camera
Total pixel	2 megapixel
Effective pixel	1280 x 1024(=1,310,720)
Zoom	9x optical, 12x digital
Shooting area	≥8.3" x 11.7"
Focus	Auto / Manual
Native Output signal	SXGA (1280 x 1024@60)
Converted Output signal	XGA(1024 x 768@60)
Resolution (Horizontal)	≥750TV lines
Built-in video scalar	Yes
Internal image save	Yes (12 pictures)
OSD	English
White balance	Auto / Manual
Image split	Yes
Text/ picture mode	Yes
Brightness adjustment	Yes
Output volume control	Yes
Positive/ Negative conversion	Yes
Image freeze	Yes
Input	RGB x2, Video x2, S-Video x1, Audio x2, Mic x1
Output	RGB x2, Video x1, S-Video x1, Audio x1
USB2.0	Yes
RS232 port	Yes
Remote control	Yes
Light source	Arm light x2(LED) A4 size light box(LED)
Dimensions	Folded: 15.9" x 16.7" x 6.1" Setup: 18.7" x 16.7" x 22.3"
Power supply	12V DC power adapter
Compliance	UL, FCC, CE, RoHS



